



DPS

Go/No Go CONDUCTANCE TESTER

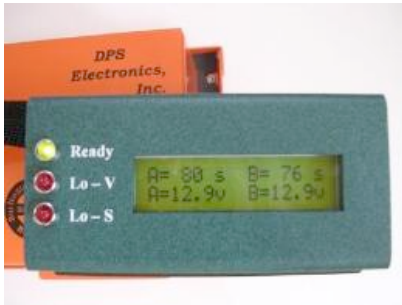

DPS 210 with LCD

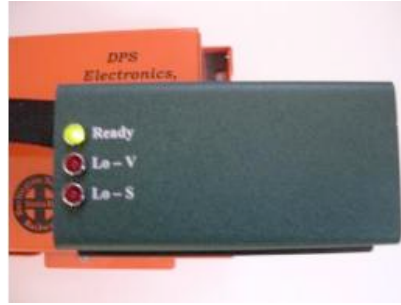

DPS 211 without LCD

Description

The DPS **Go/NoGo Conductance Tester** allows the user to easily determine if a battery is within 90% of a full charge. It also runs a conductance test to ensure that the batteries, wiring and connector are in good working order to provide optimal hours of service for the ETD.

Features

- Convenient hand held design with single plug-in operation
- A simple one-step test displays results in under 3 seconds
- LCD readout for DPS 210 provides digital readings of the Voltage and Siemens in both batteries
- 3 corresponding "Go"/ "NoGo" LEDs give the following indications:

Ready (Green) LED indicates that the pack is ready for service

Lo-V (Red) indicates that one or both of the batteries are in need of charging

Lo-S (Red) indicates that one or both of the batteries are in need of repair

- Hi/Lo Cap Switch (on side of unit) sets the cutoff point for the conductance test
- Does not drain the battery pack, no recharging required

Also available

DPS 212 with LCD for NICAD

DPS 213 without LCD for NICAD

DPS

ELECTRONICS

314-259-1261
WWW.DPSRR.COM